


Schröder

TFLEX MODULE



1-2-3

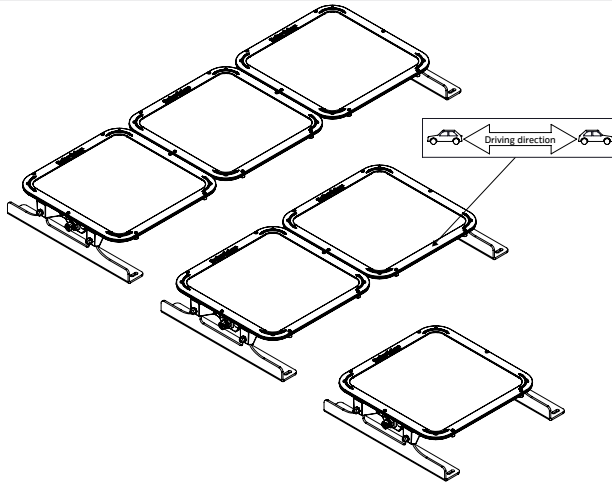


ENG	INSTALLATION INSTRUCTIONS	ITA	ISTRUZIONI DI INSTALLAZIONE	NLD	INSTALLATIE INSTRUCTIES	DAN	INSTALLATIONSVEJLEDNING	HUN	TELEPÍTÉSI ÚTMUTATÓ
DEU	INSTALLATIONSANLEITUNG	POL	INSTRUKCJE MONTAŻU	RUS	Инструкции по установке	RON	INSTRUCȚIUNI DE INSTALARE	CHI	安装说明
FRA	INSTRUCTIONS DE MONTAGE	SPA	INSTRUCCIONES DE INSTALACIÓN	POR	INSTRUÇÕES DE INSTALAÇÃO	SWE	INSTALLATIONSANVISNING	UKR	Інструкції з монтажу
SRP	UPUTSTVA ZA INSTALACIJU	AR	تعليمات التركيب						

02	PLUS	02	SGS	CE	IEC	EN60598	UL 1598	CSA C22.2	No. 250.0	3-7m	220-240V	277V	347V-480V	50/60 Hz	IP	IP	IK
															66	69	10

A

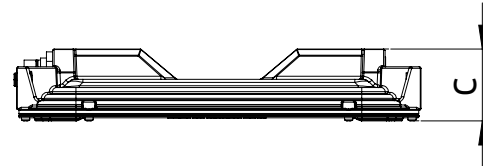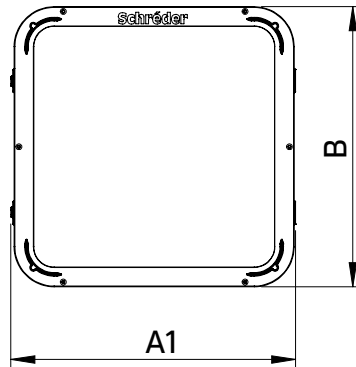



A1	391 mm
	15.3 in
A2	780 mm
	31 in
A3	1170 mm
	46 in
B	385 mm
	15 in
C	70 mm
	3 in

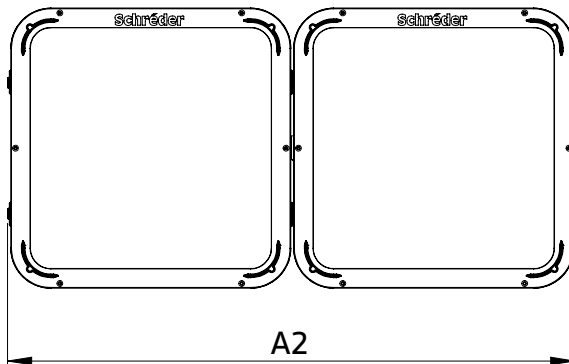

kg/lb	10B	8 kg
		17.6 lb
	20B	15 kg
		33.06 lb
	30B	23 kg
		50.70 lb

Led colour code	740
Light source energy efficiency class - High power	C

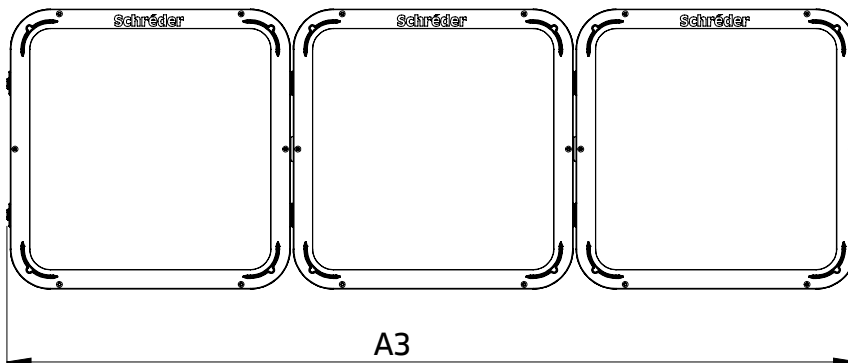




1


REMOTE MOUNTING

B

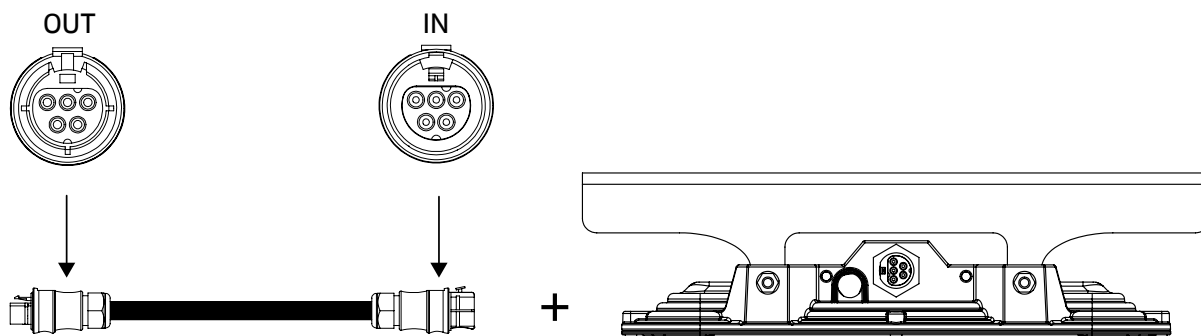

5P CONNECTOR	
CONNECTOR PIN#	
1	Circuit 1
2	
3	Circuit 2
4	
5	Earth


1

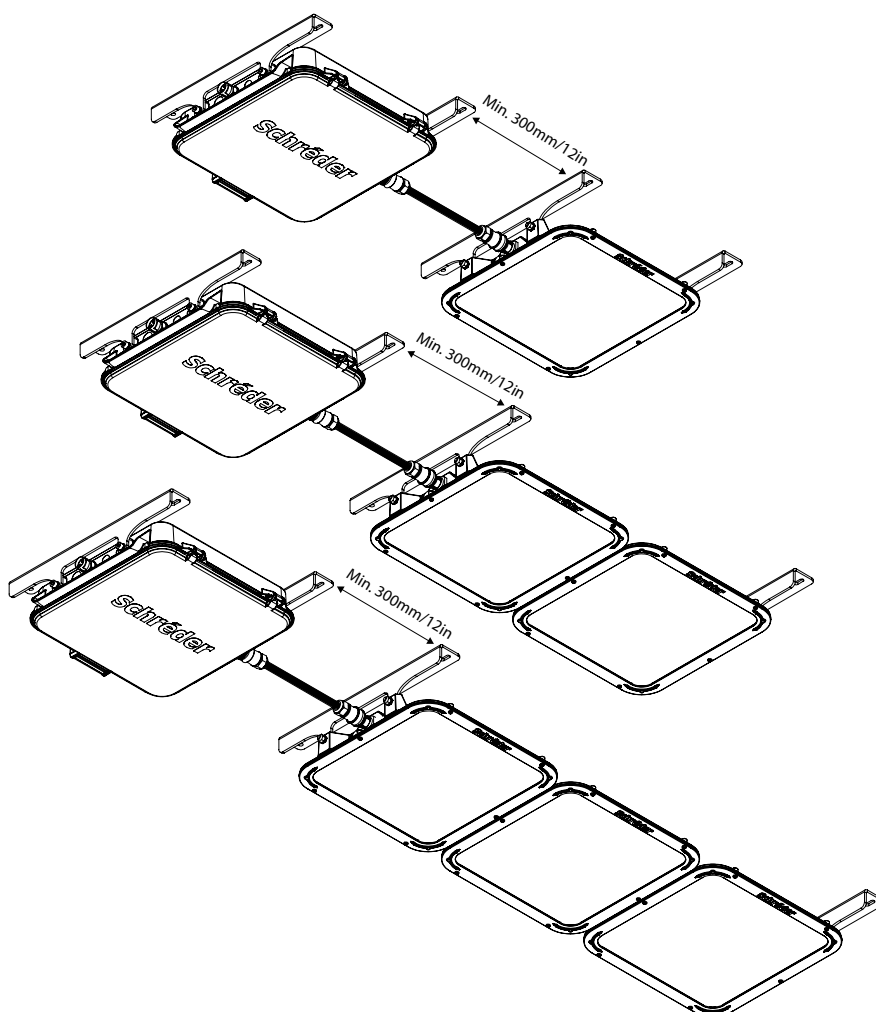




SEMI - REMOTE MOUNTING via extension cable

2

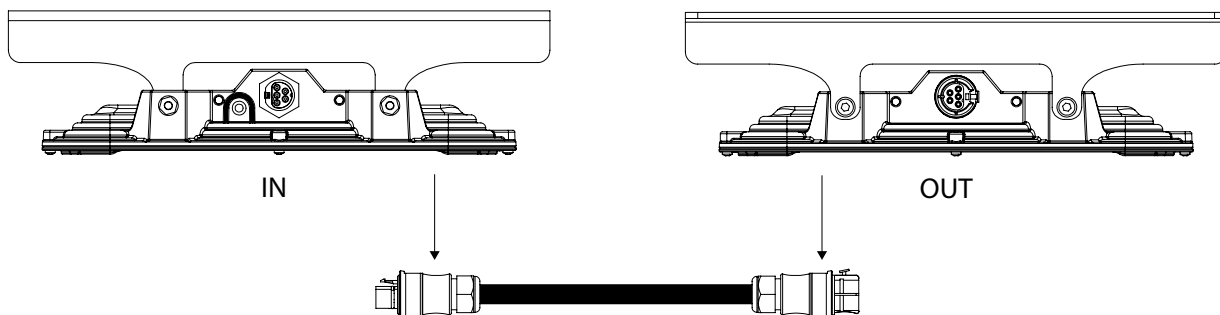

5P CONNECTOR	
CONNECTOR PIN#	
1	Circuit 1
2	
3	Circuit 2
4	
5	Earth


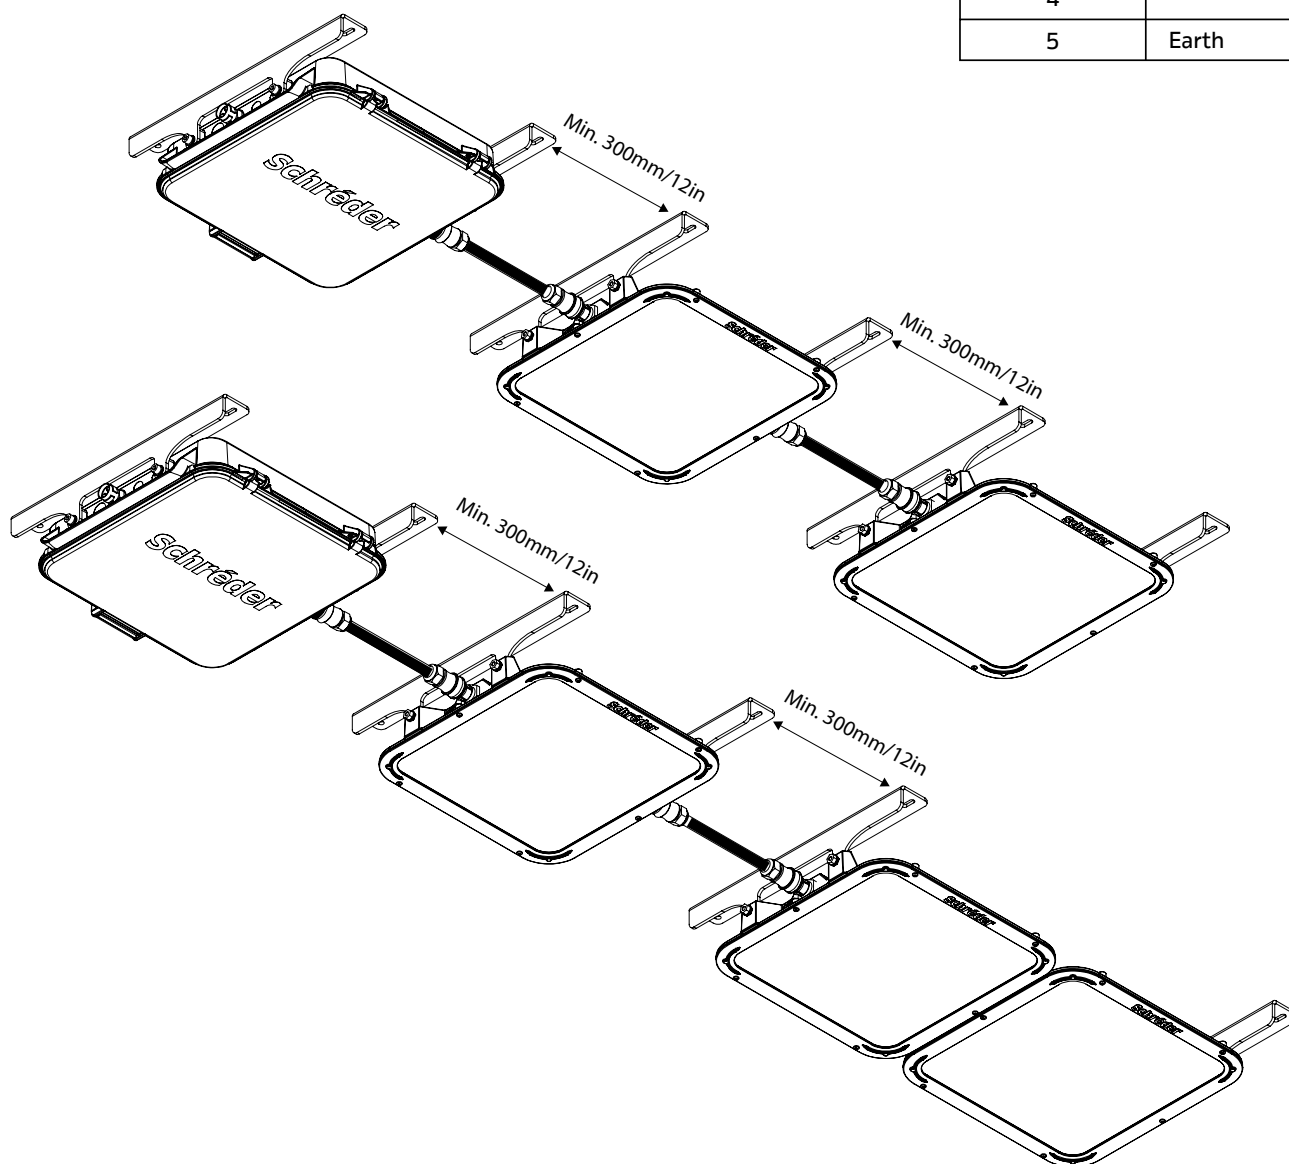


C

FIXED BRACKETS Ansi3G

Ansi3G

1

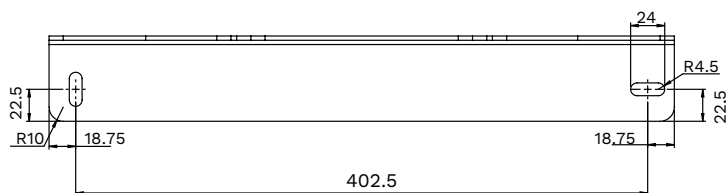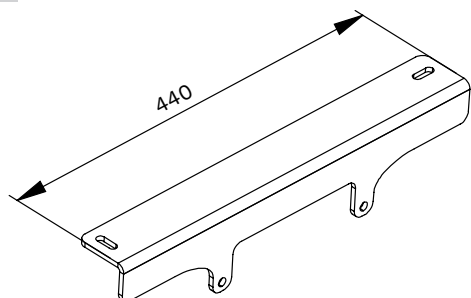

*Fixed brackets are 3G vibration compliant and available for all luminaire sizes.
**Fixation available with 2mm or 3mm thickness bracket.







2

A1	383 mm 15 in
A2	772 mm 30 in
A3	1161 mm 46 in
A3 (ANSI 3G)	1161 mm 46 in

B	402.5 mm 15.8 in
---	---------------------

C	117 mm 4.56 in
---	-------------------



kg/lb	10B	8 kg 17.6 lb
	20B	15 kg 33.06 lb
	30B	23 kg 50.70 lb

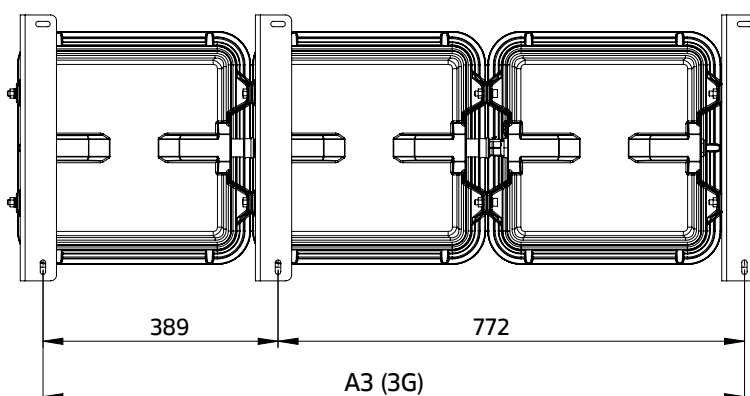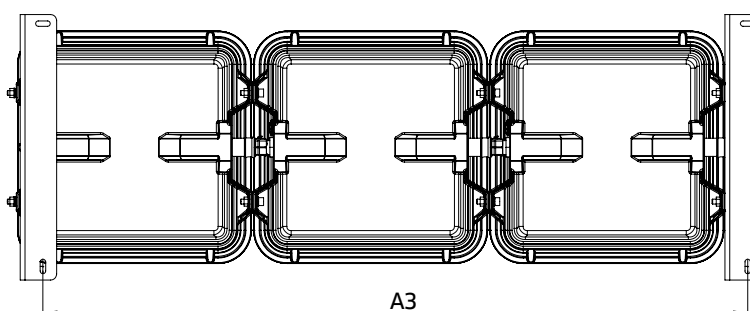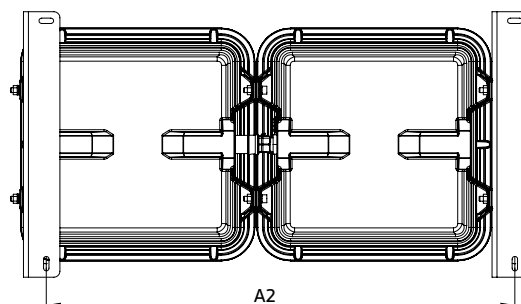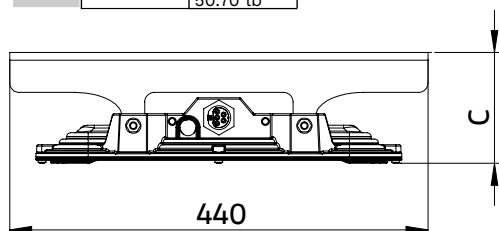

D

SUSPENDED SWIVELING FIXATION, PULL OUT





1

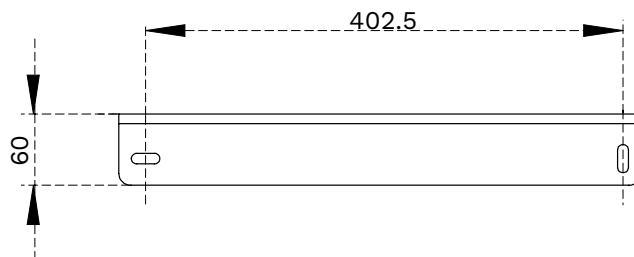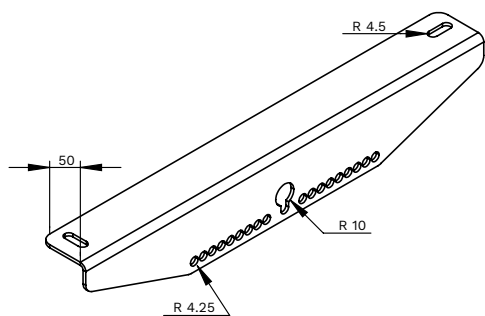



2

A1	383 mm 15 in	B	402.5 mm 15.8 in
A2	772 mm 30 in	C	170 mm 6.6 in
A3	1161 mm 46 in		


kg/lb	10B	8 kg 17.6 lb
	20B	15 kg 33.06 lb
	30B	23 kg 50.70 lb

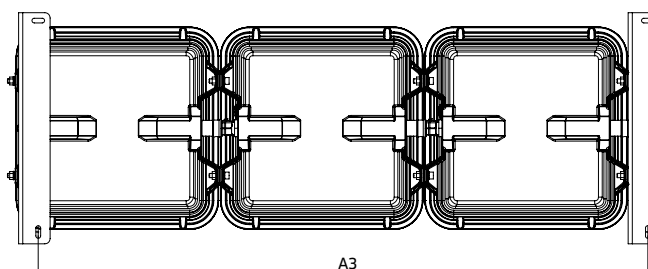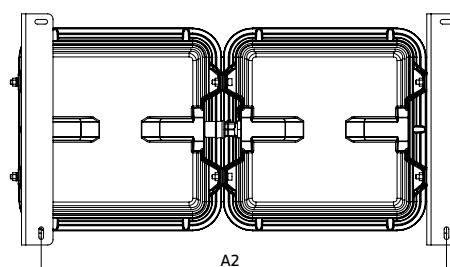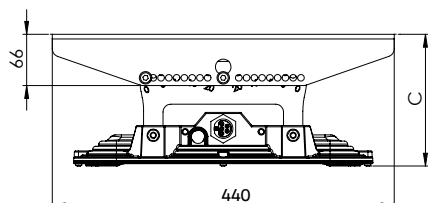

3

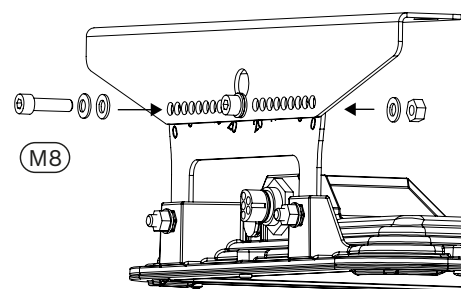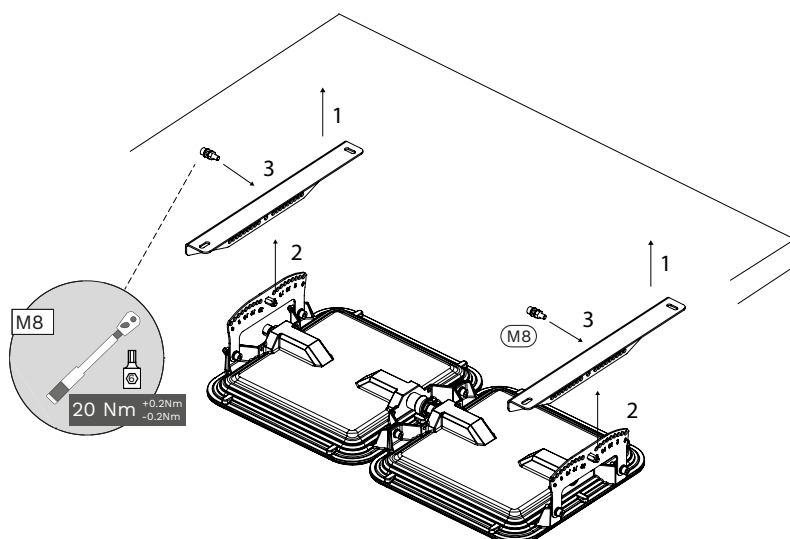


*Angle of inclination
-20° → +20°

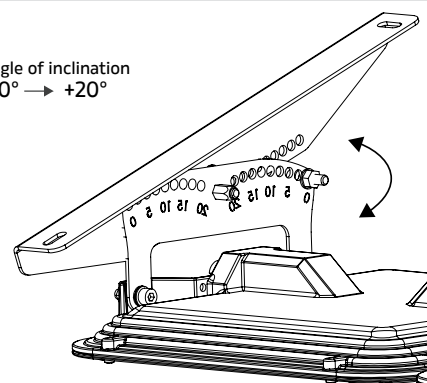

E

SUSPENDED SWIVELING FIXATION, ADJUSTABLE





1

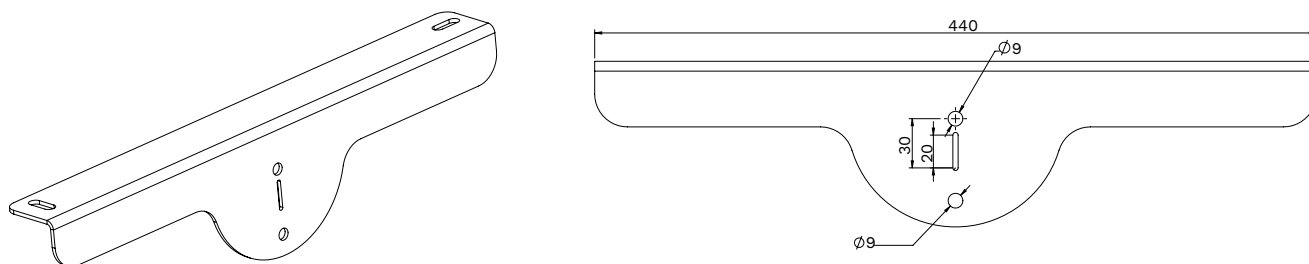


2

A1	383 mm 15 in	B	402.5 mm 15.8 in
A2	772 mm 30 in	C	190 mm 6.6 in
A3	1161 mm 46 in		

kg/lb	10B	8 kg 17.6 lb
	20B	15 kg 33.06 lb
	30B	23 kg 50.70 lb

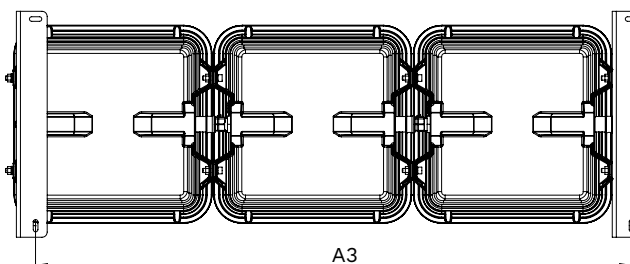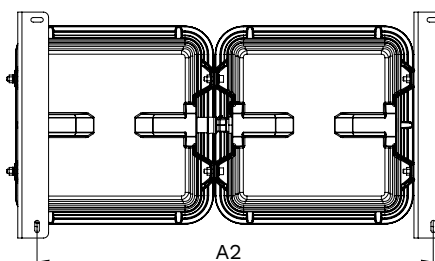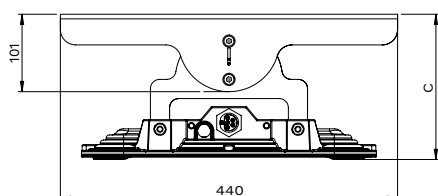


3

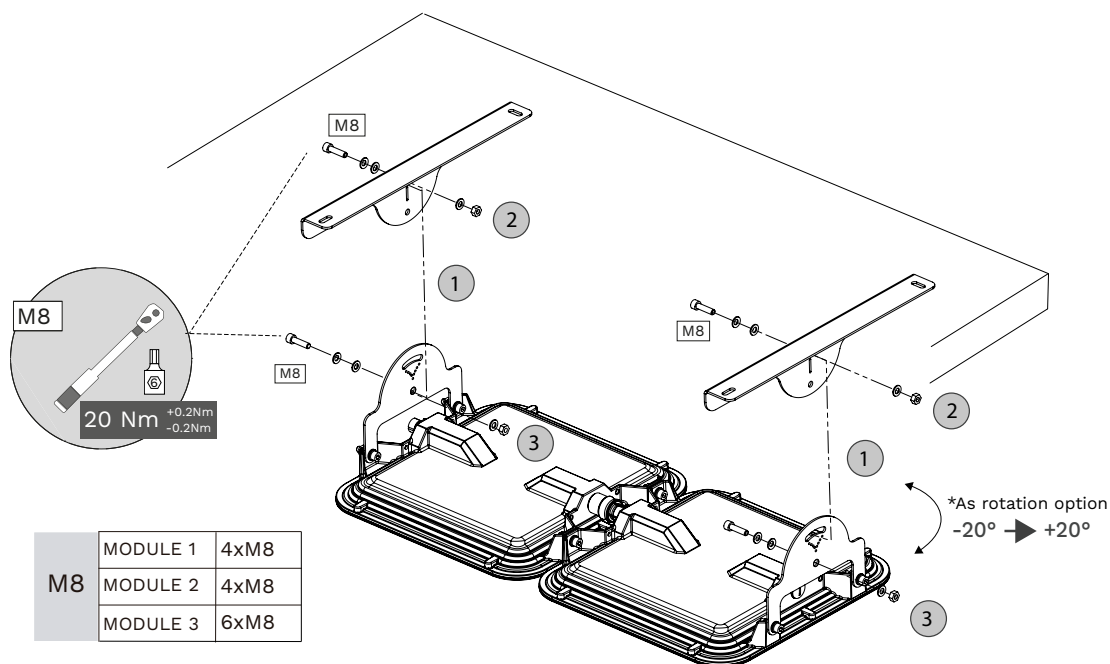

F

WALL SWIVELING FIXATION, PULL OUT

1

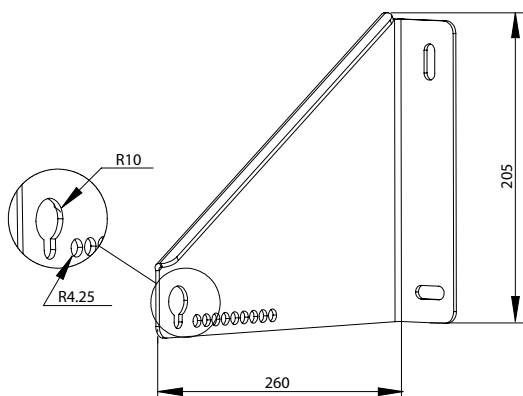





2

A1	383 mm
A2	772 mm
A3	1161 mm




B	152.5 mm
	5.9 in

C	310 mm
	12.2 in

kg/lb	10B	8 kg
		17.6 lb
	20B	15 kg
		33.06 lb
	30B	23 kg
		50.70 lb

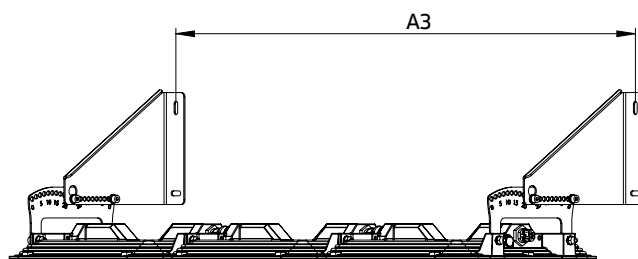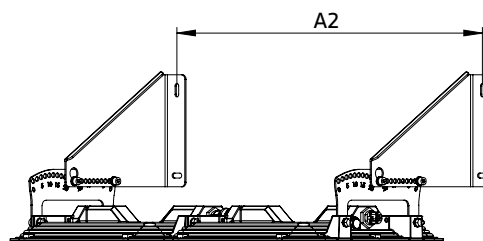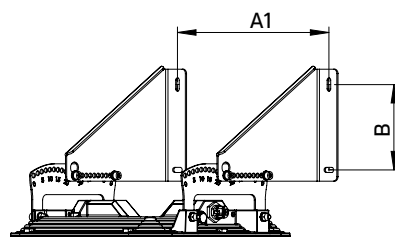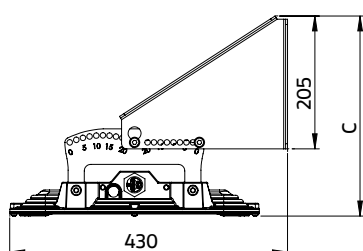


3

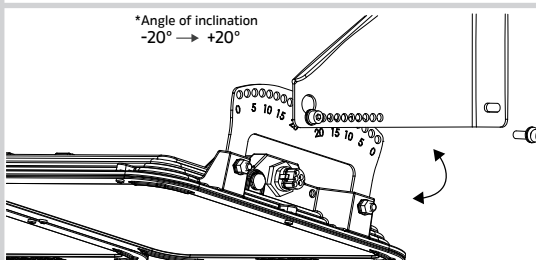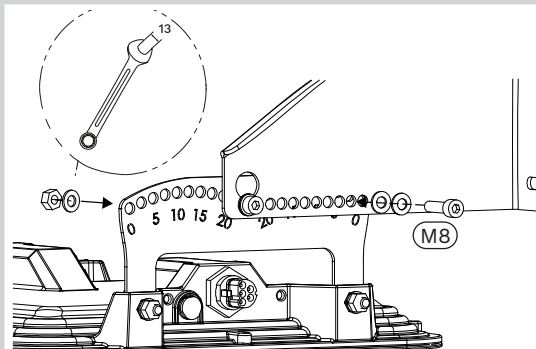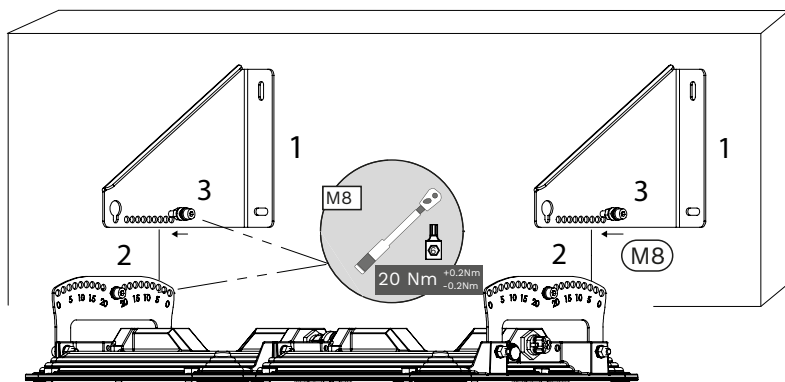

WALL SWIVELING FIXATION, ADJUSTABLE

1


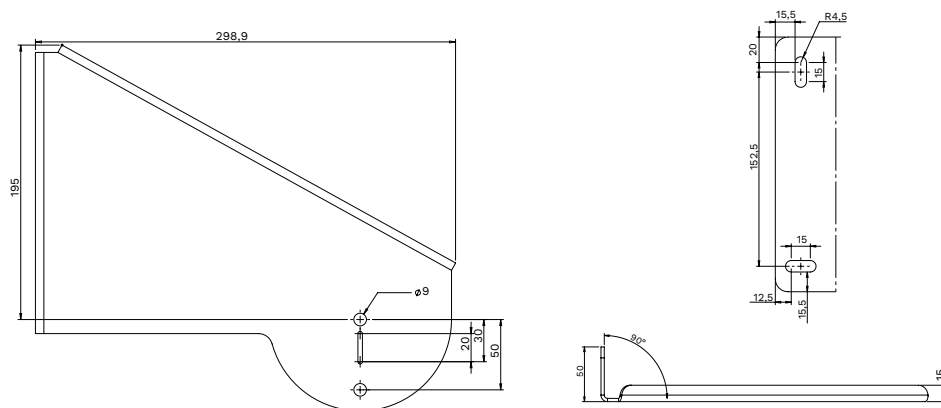


2

A1	383 mm 15 in
A2	772 mm 30 in
A3	1161 mm 46 in

B	152.5 mm 5.9 in
C	350 mm 13.7 in

kg/lb	10B	8 kg 17.6 lb
	20B	15 kg 33.06 lb
	30B	23 kg 50.70 lb

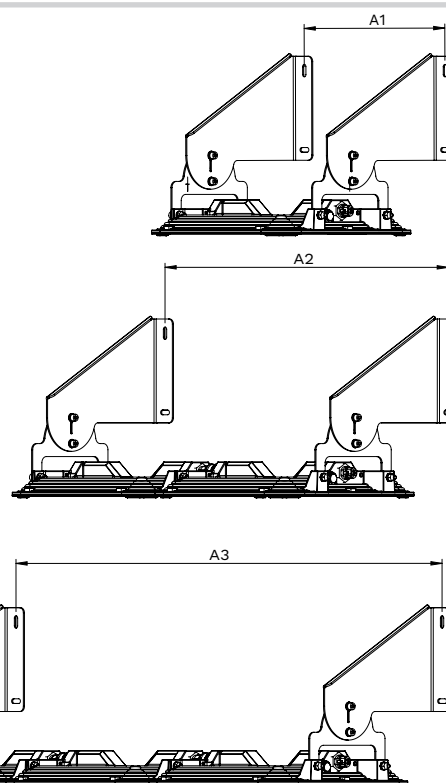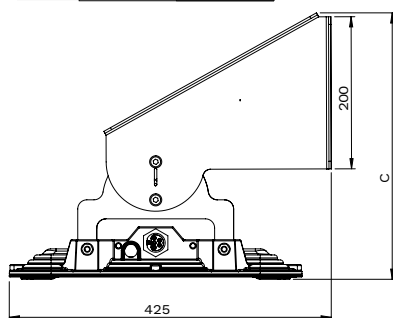


3

M8



MODULE 1	4xM8
MODULE 2	4xM8
MODULE 3	6xM8

*Angle of inclination
-20° → +20°

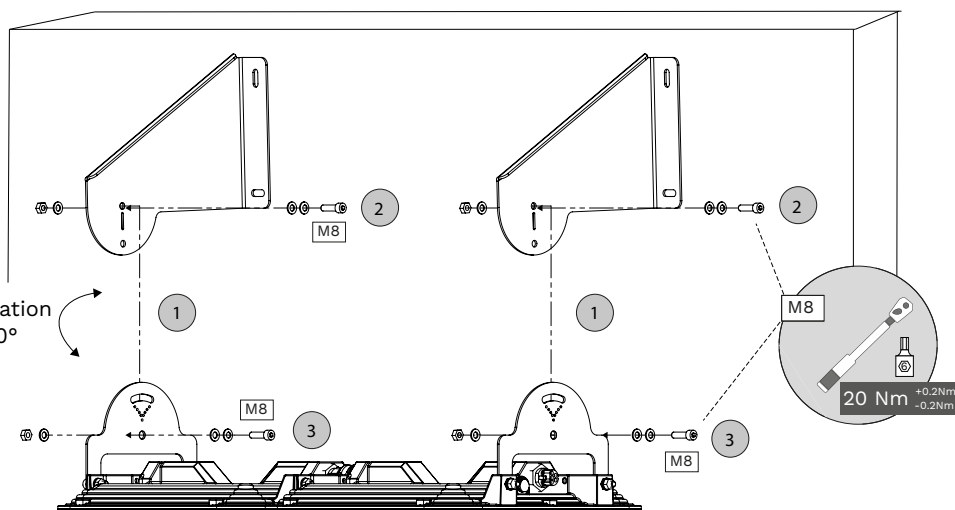

HOOK FIXATION



1

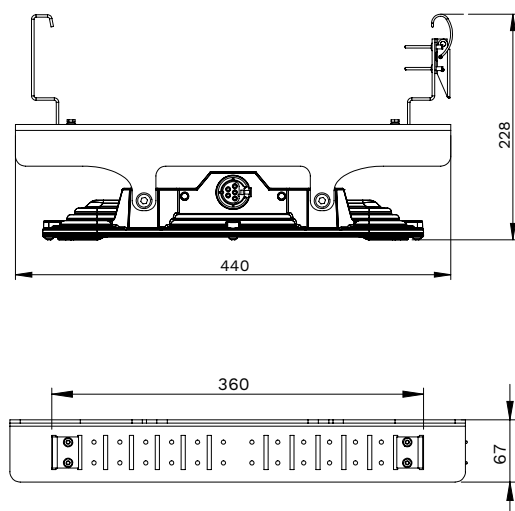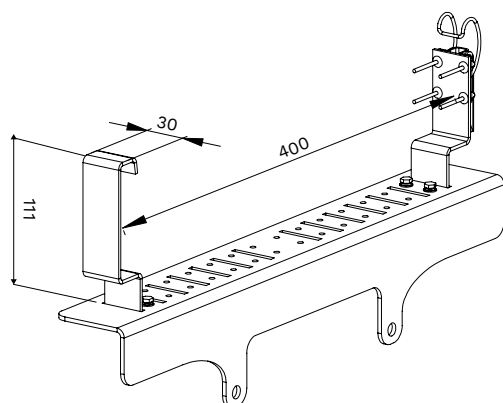

Adjust hooks following cable tray size

W100 - 400mm for standart version

2

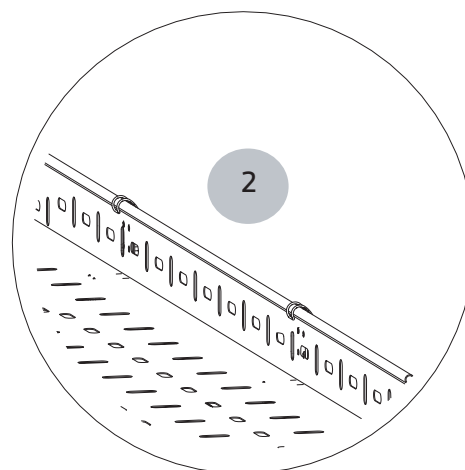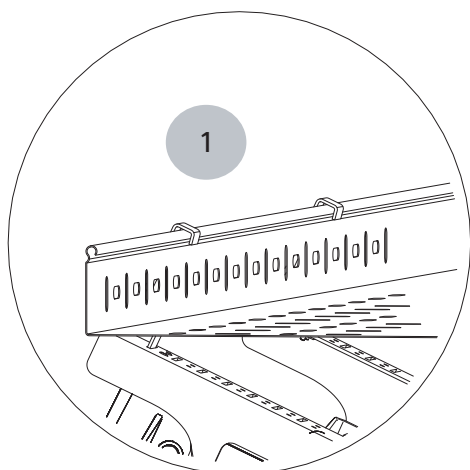

3

